Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Lynx postal box

from

Boxicon Fastighetsboxar AB



Programme:	The International EPD [®] System, www.environdec.com
°	
Programme operator:	EPD International AB
EPD registration number:	S-P-09586
Publication date:	2023-06-19
Valid until:	2028-06-18

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com





EPD[®]



General information

Programme information

Programme:	The International EPD [®] System					
	EPD International AB					
Address:	Box 210 60					
Address:	SE-100 31 Stockholm					
	Sweden					
Website:	www.environdec.com					
E-mail:	info@environdec.com					

Accountabilities for PCR, LCA and independent, third-party verification

Product Category Rules (PCR)

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product Category Rules (PCR): Construction products, 2019:14, Version 1.2.5

PCR review was conducted by: The Technical Committee of the International EPD® System. Claudia A. Peña. Contact via <u>info@environdec.com</u>

Life Cycle Assessment (LCA)

LCA accountability: Fanni Végvári, CarbonZero AB

Third-party verification

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:

LCA Studio

⊠ EPD verification by individual verifier

Third-party verifier: Vladimír Kočí, LCA Studio, Czech Republic

Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

□ Yes ⊠ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.



Company information

Owner of the EPD: Boxicon Fastighetsboxar AB

<u>Contact:</u> Olle Årman, olle.arman@boxicon.se

Description of the organisation:

Boxicon Fastighetsboxar AB is a Swedish company that produces, amongst other products, a range of postal boxes that are customised depending on the customers needs. The products are solely manufactured and assembled in Sweden. Their products are patented and are manufactured with advanced technological innovation - SteelTech, which enables them to reduce their overall environmental impact. Boxicon's products are mainly distributed within the Swedish and Norwegian market. Boxicon have made a conscious decision to reduce the amount of suppliers as well as only using local suppliers.

Name and location of production site(s): East Coast Industrilackering, Västervik

Product information

Product name: Lynx postal box.

Product identification: Lynx G3.

Product description: The Lynx postal box

Geographical scope: Sweden

LCA information

Functional unit / declared unit: 1 kg of postal box.


Reference service life: 50 years.

<u>Time representativeness:</u> The data represents the year 2022.

Database(s) and LCA software used: LCA FE v.10.7 (Sphera) with an integrated Ecoinvent database v.3.8.

<u>Description of system boundaries:</u> Cradle to grave and module D (A + B + C + D).

System diagram:

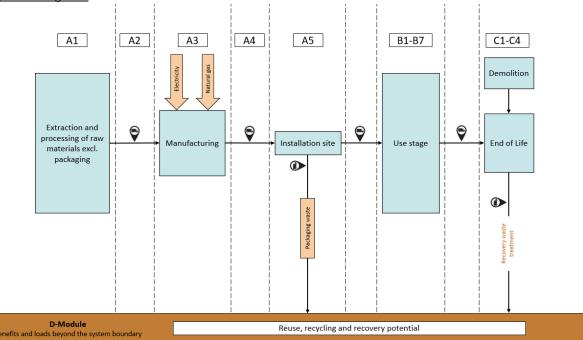

More information:

A1, raw material supply

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream to the studied manufacturing process (except for ancillary material used in product manufacturing process).

A2, transport to the manufacturer

The raw materials are transported to the manufacturing site. This also includes additives but excludes packaging.

A3, manufacturing

This module includes manufacturing of Lynx postal boxes, including packaging material.

A4, Transport

Transportation from Boxicon to the construction site is taken into account.

A5, Construction installation

This stage includes any resources used during the installation of the product on the construction site. Treatment of the packaging waste on-site is considered.

B1-B7

This stage includes no activities or emissions related to the product.

C1 Deconstruction/Demolition

This stage includes the de-construction and/or demolition of the postal boxes.

C2 Transport

Transport distance to waste processing.

C3 Waste processing

This stage includes any waste treatment needed.

C4 Final disposal

This includes any material that is landfilled.

D Benefits and loads beyond the system boundary

Emission credits are obtained from energy recovery and recycling of waste materials. In energy recovery, it is assumed that heat and electricity from waste incineration substitute thermal energy from natural gas and average Swedish electricity grid mix, respectively.

Omissions of life cycle stages

The following flows were excluded from the system boundary:

A1-A3: The plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the potential environmental impacts through the life cycle of the product.

In addition, the following flows are excluded from the system boundaries:

Flows related to human activities, such as employee transport.

Cut-off criteria

The following procedures were followed for the exclusion of inputs and output.

- All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available.
- Data gaps were filled by conservative assumptions with average or generic data. Any assumptions in such cases were documented.
- The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%).

All hazardous and toxic materials and substances are included in the inventory and the cut-off rules do not apply.

LCA: Scenarios and additional technical information

TRANSPORT FROM THE PRODUCTION PLACE TO THE USER (A4)

Transportation model

Transportation type	Capacity utilisation (incl. return) %	Type of vehicle	Distance (km)	Fuel/Energy consumption	
Truck	61%	Average truck trailer with a 27 t payload	350	1,95 l/tkm diesel	

Fuel type used

Fuel type	Database	Regional coverage	Time reference
EU 28: Diesel mix (6,35% bio-content)	Sphera	EU	2017

END OF LIFE (C2-C4)

Transport distance to waste processing (C2)

Transportation type	Capacity utilisation (incl. return) %	Type of vehicle	Distance (km)	Fuel/Energy consumption	
Truck	61%	Average truck trailer with a 27 t payload	50	1.95 l/tkm	

Waste treatment and disposal rates (C3-C4)

Packaging material	Recycling rate	Incineration rate	Landfill rate
Metal	95%	0%	5%
Powder coating	0%	100%	0%
Plastic	26%	74%	0%

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Pro	duct st	age	proc	ruction cess age	Use stage				End of life stage				Resource recovery stage			
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A1	A2	A3	A4	A5	B1	B2	В3	B4	В5	B6	B7	C1	C2	C3	C4	D
Modules declared	х	х	х	х	х	Х	Х	х	Х	Х	Х	Х	Х	х	Х	х	х
Geography	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE	SE
Specific data used	Specific data used in module A1-A3			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	0% -		-	-	-	-	-	-	-	-	-	-	-	-	-		
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	

Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Steel (cold rolled)	0,971	20	0
Aluminium	0,0073	0	0
PC	0,012	0	0
Powder coating	0,0097	0	0
TOTAL	1	20	0
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Pallet	0,116	11,6	0,048
PE film	0,00135	0,135	0
TOTAL	0,11735	11,735	0,048

During the life cycle of the product no hazardous substance listed in the "Candidate List of Substances of Very High Concern (SVHC) for authorization" has been used in a percentage higher than 0,1% of the weight of the product.

Results of the environmental performance indicators

Mandatory impact category indicators according to EN 15804

			Resul	ts per functi	onal or decla	red unit				
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
GWP-fossil	kg CO₂ eq.	2,03E+00	2,54E-02	0,00E+00	0,00E+00	0,00E+00	3,63E-03	2,46E-02	2,43E-03	-2,19E+00
GWP-biogenic	kg CO ₂ eq.	-1,50E-01	-3,54E-04	1,79E-01**	0,00E+00	0,00E+00	-5,06E-05	9,47E-07	-2,79E-05	-9,16E-05
GWP- luluc	kg CO ₂ eq.	8,01E-04	2,32E-04	0,00E+00	0,00E+00	0,00E+00	3,32E-05	2,62E-08	2,39E-06	-3,29E-04
GWP- total	kg CO ₂ eq.	1,88E+00	2,53E-02	1,79E-01**	0,00E+00	0,00E+00	3,62E-03	2,46E-02	2,41E-03	-2,19E+00
ODP	kg CFC 11 eq.	1,13E-08	2,22E-15	0,00E+00	0,00E+00	0,00E+00	3,35E-16	1,31E-15	3,89E-15	-2,24E-10
AP	mol H⁺ eq.	4,59E-03	4,74E-05	0,00E+00	0,00E+00	0,00E+00	6,77E-06	2,22E-06	7,55E-06	-4,59E-03
EP-freshwater	kg P eq.	3,38E-05	9,14E-08	0,00E+00	0,00E+00	0,00E+00	1,31E-08	3,10E-10	2,13E-09	-8,00E-07
EP- marine	kg N eq.	9,22E-04	1,96E-05	0,00E+00	0,00E+00	0,00E+00	2,80E-06	5,58E-07	1,90E-06	-9,38E-04
EP-terrestrial	mol N eq.	9,71E-03	2,24E-04	0,00E+00	0,00E+00	0,00E+00	3,20E-05	1,06E-05	2,08E-05	-9,90E-03
POCP	kg NMVOC eq.	3,41E-03	4,22E-05	0,00E+00	0,00E+00	0,00E+00	6,03E-06	1,60E-06	5,94E-06	-3,57E-03
ADP- minerals&metals*	kg Sb eq.	1,57E-06	1,62E-09	0,00E+00	0,00E+00	0,00E+00	2,32E-10	1,22E-11	6,44E-11	-9,53E-07
ADP-fossil*	MJ	2,73E+01	3,41E-01	0,00E+00	0,00E+00	0,00E+00	4,88E-02	3,30E-03	3,52E-02	-2,16E+01

WDP*	m ³	2,59E-01	2,90E-04	0,00E+00	0,00E+00	0,00E+00	4,23E-05	2,07E-03	-3,20E-05	-2,09E-01
Acronyms	GWP-fossil = G Potential land u Accumulated Ex marine = Eutrop Accumulated Ex non-fossil resou deprivation-weig	se and land us ceedance; EP whication poten ceedance; PC rces; ADP-fos	e change; O P-freshwater tial, fraction DCP = Forma sil = Abiotic o	DP = Deplet = Eutrophica of nutrients r ation potentia	ion potential of tion potential, t eaching marin I of tropospher	the stratosphe fraction of nutri e end comparti ric ozone; ADP	eric ozone lay ents reaching ment; EP-terro -minerals&me	er; AP = Aci freshwater estrial = Eut etals = Abiot	dification po end compar rophication p ic depletion	tential, tment; EP- potential, potential for

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

** Note: The biogenic content in packaging contributing to the GWP-biogenic is balanced out in A5 as positive as the packaging leaves the system boundary.

Additional mandatory and voluntary impact category indicators

Results per functional or declared unit												
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D		
GWP-GHG ¹	kg CO2 eq.	1,81E+00	2,46E-02	1,79E-01	0,00E+00	0,00E+00	3,52E-03	2,46E-02	2,28E-03	-2,10E+00		

Resource use indicators

	Results per functional or declared unit													
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D				
PERE	MJ	3,02E+00	2,42E-02	0,00E+00	0,00E+00	0,00E+00	3,56E-03	8,38E-04	3,16E-03	-6,58E-01				
PERM	MJ	2,69E-01	0,00E+00											
PERT	MJ	3,29E+00	2,42E-02	0,00E+00	0,00E+00	0,00E+00	3,56E-03	8,38E-04	3,16E-03	-6,58E-01				
PENRE	MJ	2,73E+01	3,42E-01	0,00E+00	0,00E+00	0,00E+00	4,89E-02	3,30E-03	3,52E-02	-2,16E+01				

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

PENRM	MJ	4,54E-03	0,00E+00							
PENRT	MJ	2,73E+01	3,42E-01	0,00E+00	0,00E+00	0,00E+00	4,89E-02	3,30E-03	3,52E-02	-2,16E+01
SM	kg	0,00E+00								
RSF	MJ	8,58E-24	0,00E+00	-2,26E-24						
NRSF	MJ	1,01E-22	0,00E+00	-2,65E-23						
FW	m ³	8,55E-03	2,67E-05	0,00E+00	0,00E+00	0,00E+00	3,96E-06	4,86E-05	3,96E-07	-6,00E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water									

Waste indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	9,97E-10	1,24E-12	0,00E+00	0,00E+00	0,00E+00	1,57E-13	7,50E-14	2,91E-12	-6,32E-10
Non-hazardous waste disposed	kg	8,83E-02	4,94E-05	0,00E+00	0,00E+00	0,00E+00	7,18E-06	1,01E-04	5,04E-02	-1,08E-01
Radioactive waste disposed	kg	1,78E-03	4,85E-07	0,00E+00	0,00E+00	0,00E+00	1,06E-07	1,99E-07	4,09E-07	-5,57E-05


Output flow indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00								
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,17E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,88E-03	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,97E-02	0,00E+00	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,08E-02	0,00E+00	0,00E+00

Additional environmental information

Greenhouse gas emission from the use of electricity in the manufacturing phase.

Residual mix	Unit	Value				
Location		Sweden				
Electricity mix		Nuclear: 84% Hard coal: 11% Heavy fuel oil: 2% Natural gas: 2%				
Reference year		2021				
Source		European Residual Mixes 2021 - Association of Issuing Bodies				
GWP excl. Biogenic	kg CO ₂ -eq. /kWh	0,037				

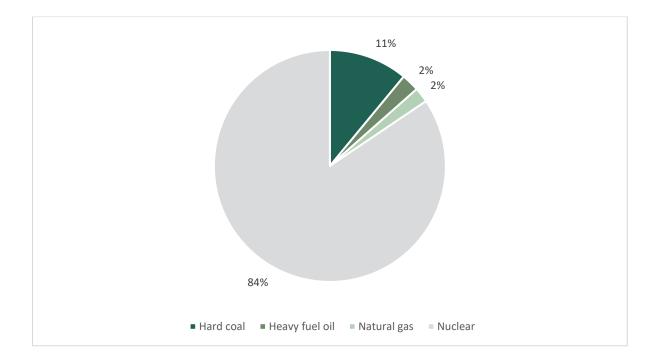

References

EN 15804:2012+A2:2019 - Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products.

General Programme Instructions of the International EPD® System. Version 4.0.

IEA, Sweden (2021) https://www.iea.org/countries/sweden Assessed 2023-05-23.

ISO 14020:2000 Environmental labels and declarations — General principles

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines

PCR 2019:14 Construction products and construction services, version 1.2.5.

SCB (2020) Treated waste by treatment category and waste category. Every second year 2010 - 2020 https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START_MI_MI0305/MI0305T003/ Assessed 2023-05-23.

Contact information

BOXICON Boxicon Fastighetsboxar AB Email: <u>info@boxicon.se</u>
Telephone: +46 08 751 81 81 Address: Boxicon Fastighetsboxar AB, Aspövägen 103, 125 40, Älvsjö, Sweden
EANDO
Fanni Végvári Email: <u>fanni.vegvari@eando.se</u> Telephone: +46 73 854 90 52 Address: CarbonZero AB, Tåstrupsgatan 2, SE-262 32 Ängelholm, Sweden
Vladimír Kocí Email: <u>vladimir.koči@lcastudio.cz</u> Telephone: +420 608 055 972 Address: LCA Studio, Šárecká 1962/5, 160 00 Praha 6
EPD International AB info@environdec.com

